

Wall Substation

Features

- Large call button for instant contact with a freely programmable extension number or alternatively activate chime signal to a group of Stentofon stations.
- Possibility to include facility boards for opening the door from indoor master stations.
- Rugged front plate of anodised brushed aluminium.
- Built-In 63 Ohm / 1W loudspeaker.
- Adjustable loudspeaker volume.
- Excellent sound quality.

Description

This door station is a weather-resistant model designed for both indoor and outdoor conditions. It flush or surface mounts on the wall and back-boxes are available for this purpose. In addition to the AlphaCom and AlphaCom M systems the station can be used with the former TouchLine and TouchLine Compact systems.

The station's call button is typically programmed to call a predetermined extension number. It may also be programmed to activate a chime signal to a group of stations. The station may be equipped with facility boards to allowing opening of the door from and indoor master station.

The station is delivered with an 0,3 m cable with a 6-pin Hirschmann plug for connection to a Hirschmann wall socket. A Modular Jack plug on the station end gives quick and easy connection to the station's circuit board. 2-pair 0,5 mm² twisted telephone cable is required between the exchange and the station. The maximum distance is 1,4 km (4600 feet) with 0,5 mm² cable. Greater distances is possible by using heavier wires.

The station is equipped with an electret microphone - which automatically adjusts to the audio level - and a 63 Ohm / 1 W loudspeaker. The loudspeaker volume is easily adjustable with a screwdriver using the potentiometer on the station's printed circuit board.

AlphaCom System



Specification

Order Number:	100 7046 000
Operation Voltage:	Powered from exchange
Cable Requirements:	2 pair twisted cable 0.5 mm ² / 24 AWG.
Temperature Range:	0° C to +40° C +32° F to +104° F
Humidity Range:	10% - 85% RH (non condensing)
Dimensions: (W x H x D)	125 mm x 280 mm x 53 mm 4,9" x 10,9" x 2,1"
Finish:	Anodised brushed aluminium
Classifications:	Designed to meet IP54
Loudspeaker Output:	1 W (63 Ohm)
Loudspeaker Impedance:	63 Ohm
Frequency Range:	300 - 5000 Hz
Loudspeaker Sound	75 dB (0,5 mm cable x 100 m,
Pressure Level:	2,5 V _{RMC} on ab-wire, 1 KHz)
Microphone Output Voltage:	100/300 mV
Microphone Preamp.	600 Ohm
Output Impedance:	Modular Jack




STENTOFON

100 7046 000

STENTOFON products are developed and marketed by ZENITEL NORWAY ASA. The company's Quality Assurance System is certified to meet the requirements in NS-EN ISO 9001:2000. ZENITEL NORWAY ASA reserves the right to modify designs and alter specifications without prior notice, in pursuance of a policy of continuous improvement.

Wall Sub Station

Installation

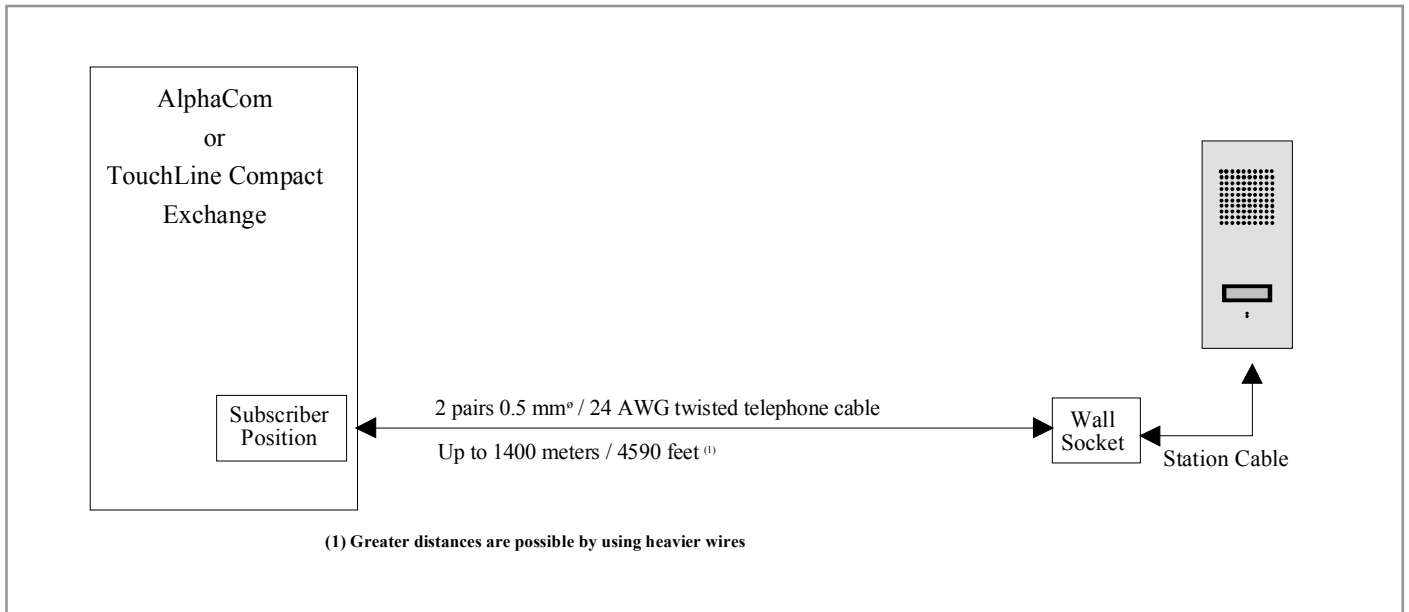

Ordering information

Order Number	Description	Ship Weight metric/imperial
100 7046 000	AlphaCom Wall Substation	600 gr. / 1 lb. 5 oz
Supplementary equipment:		
1000 6030 00	Surface Mount Back Box for AlphaCom Wall Stations	1 kg / 2 lb. 3 oz
1000 6020 00	Flush Mount Back Box for AlphaCom Wall Stations	600 gr. / 1 lb. 5 oz



Zenitel Norway ASA
www.zenitel.biz
css@zenitel.biz

