




**BOSCH**

Invented for life


# LSN 1500 A LSN improved Module 1500 mA

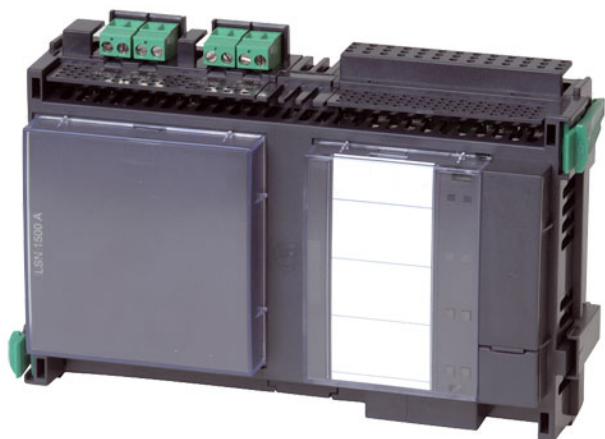

- ▶ Up to 254 LSN improved elements
- ▶ Line length up to 3000 m, depending on configuration and cable type
- ▶ Unshielded cable can be used
- ▶ Line current up to 1500 mA, depending on configuration and cable type
- ▶ Additional voltage output (ERT-capable)
- ▶ Flexible network structures (loop, stub, and T-tap)
- ▶ Addressing techniques: LSN improved auto-addressing, LSN classic auto-addressing and manual address assignment

This module allows the connection of an LSN loop with up to 254 LSN improved elements with a maximum line current of 1500 mA or with up to 127 standard LSN elements, with a maximum line current of 300 mA.

### System Overview

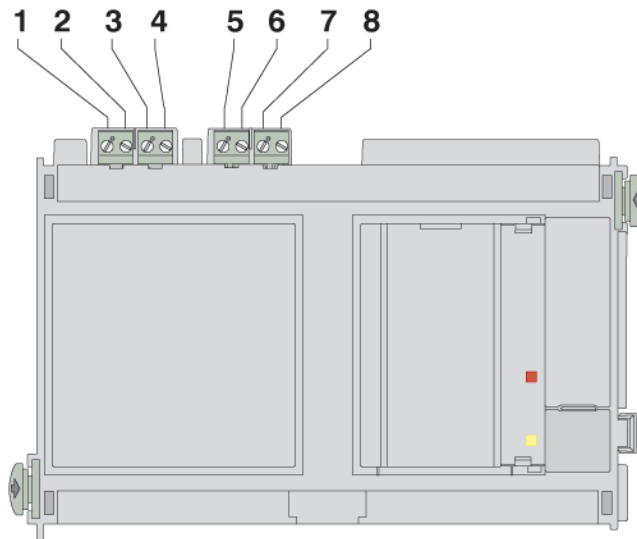

Ite	Description	Connection	
m			
LSN	LSN stub		
loo			
p			
1/2	AUX1 + / -	Auxiliary power supply	Auxiliary power supply stub 1
3	LSN a1-	LSN a1- outgoing	Stub 1 LSN a1-
4	LSN b1+	LSN b1+ outgoing	Stub 1 LSN b1+

Item	Description	Connection	
5/6	AUX2 +/-	Auxiliary power supply***	Auxiliary power supply stub 2
7	LSN a2-	LSN a2- incoming	Stub 2 LSN a1-
8	LSN b2+	LSN b2+ incoming	Stub 2 LSN b1+

\*\*\* Auxiliary power must only be returned to AUX2 in looped isolators (ERT systems). [Suitable isolators include YBO-R/SCI isolators]

### Installation/Configuration Notes

#### System limits for each LSN 1500 A LSN improved Module

**Note** Current consumption of the connected devices and cable length can be calculated with the Fire System Designer (FSD).

- Country-specific standards and guidelines must be considered during planning.
- It can only be plugged in on the left side of a PRD 0004 A panel rail and requires two slots!

### Parts Included

Qty.	Components
1	LSN 1500 A LSN improved Module 1500 mA

**Note** Ready for delivery on request.

### Technical Specifications

#### Electrical systems

Input voltage	20 V DC ... 30 V DC (min...max) / 5 V DC ± 5 %
Output voltage:	
• LSN standby voltage	30 ± 0.85 V DC
• LSN transmission voltage	30 ± 0.85 V DC + 1.6 ± 0.15 V DC (voltage hub)
• Aux auxiliary power	28 ± 1.0 V DC
Max. current consumption	4010 mA at 24 V DC
Nom. Current consumpt.:	
• Module	260 mA at 24 V DC
• LSN	1,6 x current consumption of LSN elements
• AUX	1,35 x Auxiliary power

LSN line current:	
• Standby	Max. 750 mA, depending on configuration and cable type
• Alarm	Max. 1500 mA, depending on configuration and cable type, Max. 300 mA at connection of standard LSN elements
AUX auxiliary power (28 V DC)	Max. 500 mA in an LSN loop (ERT system) or 2 x max. 500 mA in 2 stubs

#### Mechanical systems

Operation/display elements	2 LEDs ( red = alarm, yellow = fault) 1 button (LED test)
Housing material	ABS plastic, (UL94 V-0)
Housing color	Satin finish, anthracite, RAL 7016
Dimensions	Approx. 127 x 190 x 60 mm (5.0 x 7.6 x 2.4 in.)
Weight	Approx. 440 g

#### System limits

Max. line length	3000 m, depending on configuration and cable type
Number of elements	Max. 127 standard LSN elements Max. 254 LSN improved elements

#### Environmental conditions

Permissible operating temperature	-5 °C ... 50 °C (23 °F ... 122 °F)
Permitted storage temperature	-20 °C ... 60 °C (-4 °F ... 140 °F)
Permitted relative humidity	95 %, non-condensing
Protection class as per IEC 60529	IP 30

### Ordering Information

**LSN 1500 A LSN improved Module 1500 mA      LSN 1500 A**  
Ready for delivery on request

**Europe, Middle East, Africa:**  
Bosch Security Systems B.V.  
P.O. Box 80002  
5600 JB Eindhoven, The Netherlands  
Phone: + 31 40 2577 284  
Fax: +31 40 2577 330  
emea.securitysystems@bosch.com  
www.boschsecurity.com

**Americas:**  
Bosch Security Systems, Inc.  
130 Perinton Parkway  
Fairport, New York, 14450, USA  
Phone: +1 800 289 0096  
Fax: +1 585 223 9180  
security.sales@us.bosch.com  
www.boschsecurity.us

**Asia-Pacific:**  
Bosch Security Systems Pte Ltd  
38C Jalan Pemimpin  
Singapore 577180  
Phone: +65 6319 3450  
Fax: +65 6319 3499  
apr.securitysystems@bosch.com  
www.boschsecurity.com

**Represented by**