



SCENA 650/1000



SCENA 650/1000 is a theatre light for 650/1000W lamps. SCENA 650/1000 is a distinct evolution in comparison with other lights in its category, offering operating features suitable for even the most demanding applications.



PACKING
(LxDxH) 610 x 440 x 250 mm
11 Kg
Contains 2 units



SCENA 650/1000 PC (Cod. 03.TS002.A)

- Anti-halo Ø 150mm lens
- Black colour

SCENA 650/1000 FRESNEL (Cod. 03.TS002.F)

- Fresnel Ø 150mm lens
- Black colour

SCENA 650/1000 OPTICAL (Cod. 03.TS002.O)

- Optical Ø 150mm lens
- Black colour

Also available with Aluminium white finishing (RAL 9006).

Optical group

Anti-halo Ø 150mm lens or Optical Ø 150mm lens or Fresnel Ø 150mm lens
Focal adjustment with endless screws from 10° to 64° (PC) or 13° to 53° (OPTICAL / FRESNEL) giving precision movement on a double track
Spherical reflector in polished and treated 99.9% aluminium

Lamp holder

GX9.5 lampholder for 650/1000 W lamps

Construction

Extremely strong housing with aluminium edge profiles

Frontal protection grille

Boxed gel holder (with total elimination of parasite light)

Reinforced bracket, with great increase in thickness


Greater body size, with efficient internal ventilation labyrinth

Easy lens access for dismantling and cleaning

Power supply

230V 50/60Hz

CP70,GX9,5, 1000W

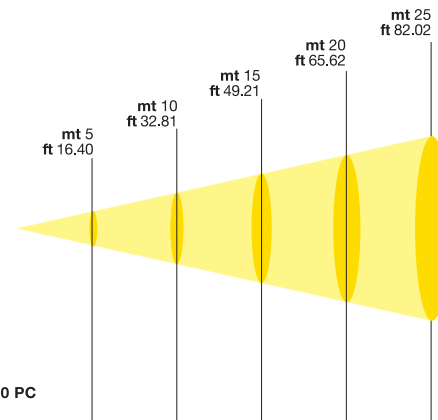

APPROVED LAMPS

| Model | Watt | Base | K° | Lumens | Life (Hours) | Use |
|-------|-------|-------|-------|--------|--------------|---------|
| CP67 | 650 | GX9,5 | 3.200 | 16.500 | 400 | Cine/TV |
| T21 | 650 | GX9,5 | 3.050 | 13.000 | 900 | Theatre |
| CP70 | 1.000 | GX9,5 | 3.200 | 25.000 | 200 | Cine/TV |
| TI19 | 1.000 | GX9,5 | 3.050 | 21.500 | 750 | Theatre |

ACCESSORIES

- Barndoor (black) (Cod. 03.TBD02)
- Barndoor (RAL 9006) (Cod. 03.TBD02.44)
- Gel filter holder (black) (Cod. 02M00417.27)
- Gel filter holder (RAL 9006) (Cod. 02M00417.44)
- "C" clamp G50 Black (max. load 10Kg) (cod. 0521A012)
- "C" clamp G50 Chrome (max. load 10Kg) (cod. 0521A012.20)
- Floor-stand (black) (cod. 0521A013)
- Floor-stand (chrome) (cod. 0521A013.20)
- Safety steel cable (3mm x 60 cm), Ring spring catch, max. capacity load 60Kg (cod. 0521A010)
- Gel filters (see page 210)

SCENA 1000 PC

| | 5250 | 1313 | 583 | 328 | 210 | |
|---------------------|--------|--------|-------|-------|--------|-----------------------|
| Lux center | 5250 | 1313 | 583 | 328 | 210 | |
| Foot candles | 487,92 | 121,98 | 54,21 | 30,49 | 19,52 | Beam angle 10° |
| Diameter mt. | 0,87 | 1,75 | 2,62 | 3,50 | 4,37 | |
| Diameter ft. | 2,87 | 5,74 | 8,61 | 11,48 | 14,35 | |
| Lux center | 390 | 98 | 43 | 24 | 16 | |
| Foot candles | 36,25 | 9,06 | 4,03 | 2,27 | 1,45 | Beam angle 64° |
| Diameter mt. | 6,25 | 12,50 | 18,75 | 24,99 | 31,24 | |
| Diameter ft. | 20,50 | 41,00 | 61,50 | 82,00 | 102,50 | |

SCENA 1000 FRESNEL

| | 4660 | 1165 | 518 | 291 | 186 | |
|---------------------|--------|--------|-------|-------|-------|-----------------------|
| Lux center | 4660 | 1165 | 518 | 291 | 186 | |
| Foot candles | 433,09 | 108,27 | 48,12 | 27,07 | 17,32 | Beam angle 13° |
| Diameter mt. | 1,14 | 2,28 | 3,42 | 4,56 | 5,70 | |
| Diameter ft. | 3,74 | 7,48 | 11,21 | 14,95 | 18,69 | |
| Lux center | 500 | 125 | 56 | 31 | 20 | |
| Foot candles | 46,47 | 11,62 | 5,16 | 2,90 | 1,86 | Beam angle 56° |
| Diameter mt. | 5,32 | 10,63 | 15,95 | 21,27 | 26,59 | |
| Diameter ft. | 17,44 | 34,89 | 52,33 | 69,78 | 87,22 | |