

Subscriber line Board ASLT

Features

- Can be used with InterGuard, TouchLine and Pamex stations.
- Each board provides 6 subscriber connections
- 6 remote control outputs (software configurable activation)
- 1 voice-switched conversation per board
- When using handset or full duplex conference unit at both ends, the system is non-blocking within each module.
- All subscriber connections suitable for display stations
- Line monitoring
- Software-controlled output volume control
- Hot plug-in/plug-out
- Red/green/amber LED indicates system status

Description

This board contains circuitry for 6 subscriber connections and one measurement channel for voice switching control. It plugs into any position 1 - 23.

The board provides 6 remote control outputs that are software-controlled. The line monitoring reports errors on all subscriber lines.


The board can be plugged in/out while the exchange is running. A hot plug-in cable is needed for this purpose. The cable is included in the cable set for the exchange.

A four-wire interface provides compatibility with existing standard station range from STENTOFON with the exception of TouchLine display stations produced earlier than March 1995. These stations are no longer compatible due to reduction on the display signal output from the exchange.

TouchLine display stations produced after March 1995 are labeled version 1.1 and are fully compatible with the AlphaCom exchange.

All signals for external equipment is run to a connection board mounted on the connection field of the exchange.

AlphaCom System

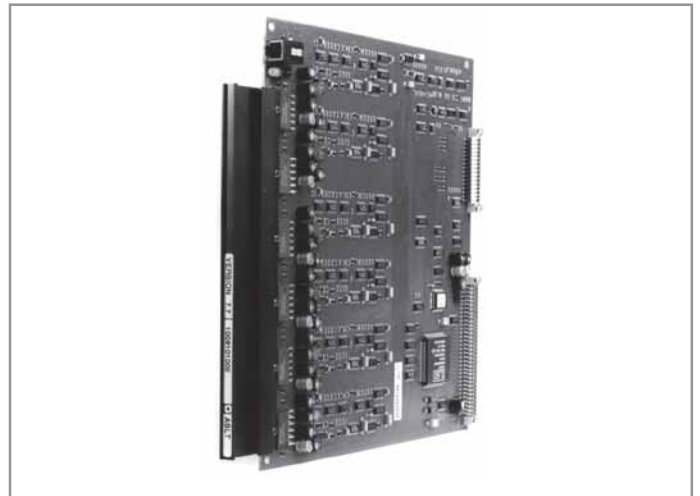

Specification

Order Number:	100 9101 010
Operation Voltage:	5, 15, 24, 32 V DC
Dimensions (W x H x D):	10 mm x 230 mm x 263 mm 0.39" x 8.97" x 10.26" Double Extended Europe Format
S/N ratio (conversation):	60 dB
Minimum impedance loudspeaker:	20 ohm
Input impedance (c-d):	600 ohm
Frequency range:	
Conversation	200 - 10,000 Hz
Program distr.	200 - 15,000 Hz
Crosstalk at 1 kHz	< -80 dB
Capacity for each ASLT board:	6 subscribers
Duplex-controlled conversations:	1 voice-switched conversation per board
Remote control outputs	5V 2.2 Kohm
Cable type:	2-pair twisted cable per station
Max. cable length to station:	2 km (0.6mm ² - 22 AWG) 1.4 km (0.5 mm ² - 24 AWG)
Distortion:	< 2%
Output power:	3-4 W at 20 ohm 0.6 W at 20 ohm 1 W at 63 ohm
Indicator:	LED (red/green/amber)




STENTOFON

100 9101 010

STENTOFON products are developed and marketed by ZENITEL NORWAY ASA. The company's Quality Assurance System is certified to meet the requirements in NS-EN ISO 9001:2000. ZENITEL NORWAY ASA reserves the right to modify designs and alter specifications without prior notice, in pursuance of a policy of continuous improvement.

Subscriber Line Board ASLT

Sound Pressure Level

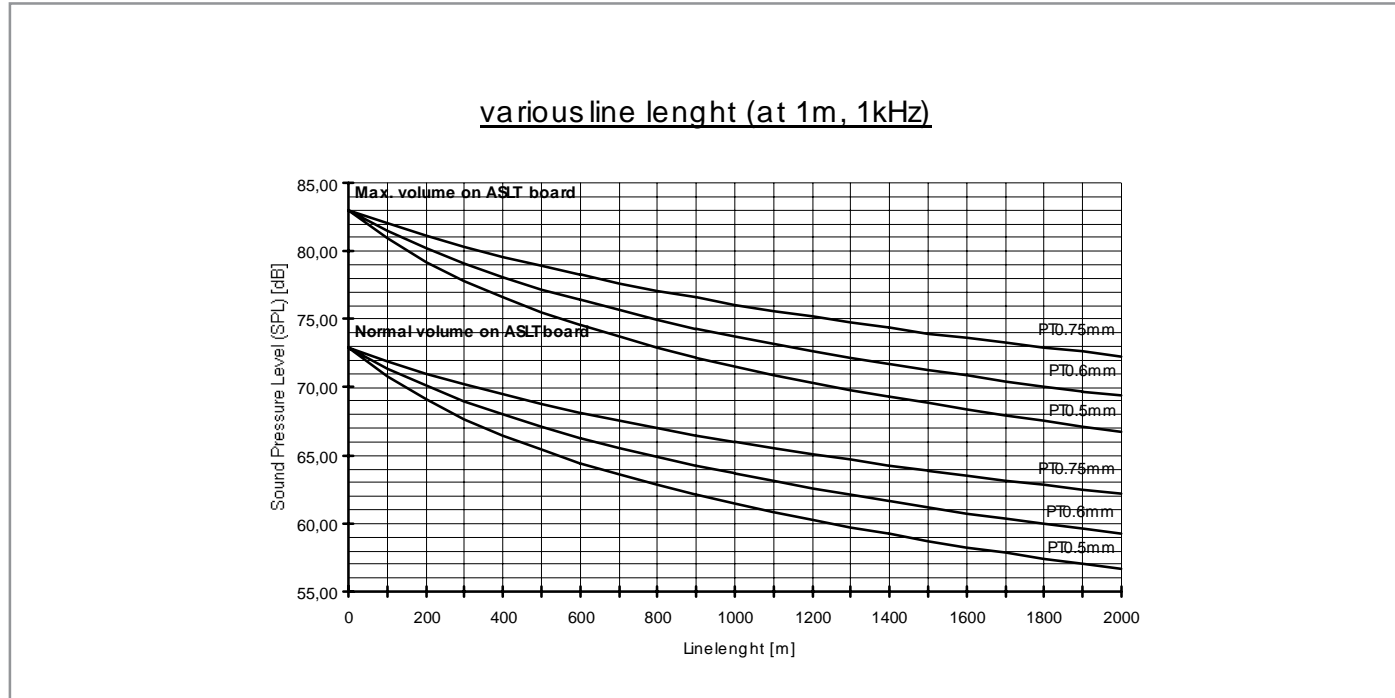

Installation Cable type & distance

2-pair twisted cable for each station. Multi-pair cable can be used, but must be twisted in pairs of two.
Max. loop resistance 240 ohms.

Wire Diameter		Maximum Distance	
0,5 mm	24 AWG	1,4 km	4590 feet
0,6 mm	22 AWG	2,0 km	6560 feet
0,8 mm	20 AWG	3,4 km	11 150 feet
0,9 mm	18 AWG	4,0 km	13 120 feet

Ordering information

Order Number	Description	Ship Weight metric/imperial
100 9101 010	Subscriber Line Board ASLT	0.5 kg / 1.1 lb.
Supplementary equipment:		
100 9930 200	Subscriber Connection Board, Krone terminals (for mounting on distribution field)	0.075 kg / 0.2 lb.
100 9501 011	1.5 m Subscriber Connection Cable with Filter Board (flat cable)	0.2 kg / 0.4 lb.
100 9501 021	5 m Subscriber Connection Cable with Filter Board (round cable)	0.65 kg / 1.4 lb.
100 9501 023	10 m Subscriber Connection Cable with Filter Board (round cable)	1.2 kg / 2.6 lb.
00 9910 120	Distribution Field for Subscriber Connection Boards ASLT	



Zenitel Norway ASA
www.zenitel.biz
css@zenitel.biz

