



# NZM 0002 A Notification Appliance Zone Module




The NZM 0002 A Notification Appliance Zone Module provides two monitored primary lines. This enables the connection of two separate notification appliance zone lines.

The following can be connected:

- Sirens
- Strobe lamps
- Horns

The operating status of each zone is shown by a red and a yellow status LED.

**System Overview**

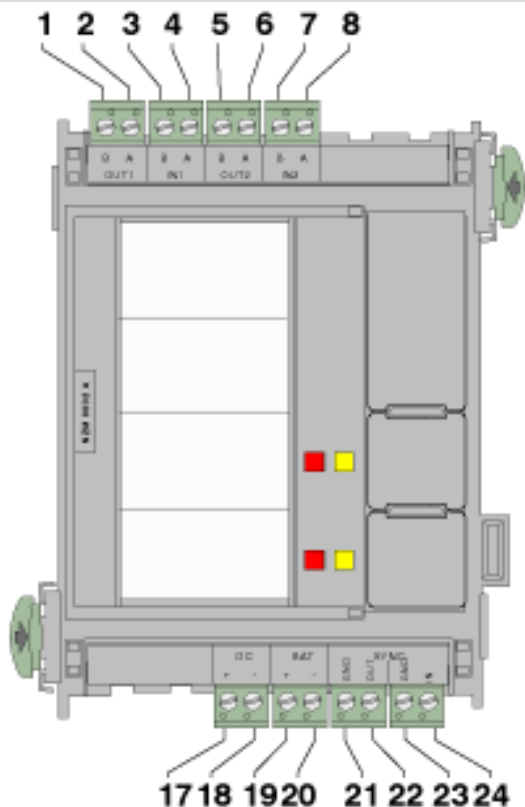

Pos.	Description	Connector
1 / 2	B OUT1/A OUT1	NAC zone 1
3 / 4	B IN1/A IN1	
5 / 6	B OUT2/A OUT2	NAC zone 2
7 / 8	B IN2/A IN2	
17 / 18	DC + / -	External power supply via HPD 0000 A Power distributor
19 / 20	BAT + / -	24 V DC input, battery voltage
21 / 22	SYNC GND/OUT	Synchronization output
23 / 24	SYNC GND/IN	Synchronization input

**Parts Included**

Qty.	Components
1	NZM 0002 A Notification Appliance Zone Module
2	Labelling strips

**Technical Specifications**

**Electrical**

Input voltage	20 V DC ... 30 V DC (min...max) 5 V DC ± 5%
Max. current consumption	<ul style="list-style-type: none"> <li>Standby (2 zones) 40 mA (at 24 V DC)</li> <li>Alarm (2 zones) 65 mA (at 24 V DC)</li> </ul>
Max. output voltage	29.5 V DC
Max. output current	500 mA per notification appliance zone line (in the event of an alarm)
Max. cable length	Dependent on type and number of connected signaling devices

**Mechanics**

Operating/display elements	4 LEDs (2 x red, 2 x yellow) 1 key
Housing material	ABS plastic, Polyac PA-766 (UL94 V-0)
Housing color	Satin finish, anthracite, RAL 7016
Dimensions	Approx. 127 x 96 x 60 mm (5.0 x 3.8 x 2.4 in.)
Weight	Approx. 135 g (4.8 ounces)

**Environmental conditions**

Permitted operating temperature	-5 °C ... 50 °C (23 °F ... 122 °F)
Permitted storage temperature	-20 °C ... 60 °C (-4 °F ... 140 °F)
Permitted relative humidity	95%, non-condensing
Protection class as per IEC 60529	IP 30

**Ordering Information**

<b>NZM 0002 A Notification Appliance Zone Module</b>	<b>NZM 0002 A</b>
<b>Accessories</b>	
<b>HPD 0000 A Power Distributor</b>	<b>HPD 0000 A</b>
<b>NMC 0000 A Cable HPD/NZM</b> Used for synchronization in accordance with UL requirements, cable length 90 cm	<b>NMC 0000 A</b>

**Europe, Middle East, Africa:**  
Bosch Security Systems B.V.  
P.O. Box 80002  
5600 JB Eindhoven, The Netherlands  
Phone: + 31 40 2577 284  
Fax: +31 40 2577 330  
emea.securitysystems@bosch.com  
www.boschsecurity.com

**Americas:**  
Bosch Security Systems, Inc.  
130 Perinton Parkway  
Fairport, New York, 14450, USA  
Phone: +1 800 289 0096  
Fax: +1 585 223 9180  
security.sales@us.bosch.com  
www.boschsecurity.us

**Asia-Pacific:**  
Bosch Security Systems Pte Ltd  
38C Jalan Pemimpin  
Singapore 577180  
Phone: +65 6319 3450  
Fax: +65 6319 3499  
apr.securitysystems@bosch.com  
www.boschsecurity.com

**Represented by**