




FNS-420-R LSN Strobe, Red



- ▶ **Quick installation**
- ▶ **No additional cabling or power supply**
- ▶ **Low consumption thanks to LED-technology**
- ▶ **Synchronized flash rate of 1 Hz**

The FNS-420-R LSN Strobe is an optical signaling device and can be connected exclusively to the FPA-5000 fire panel.

System Overview

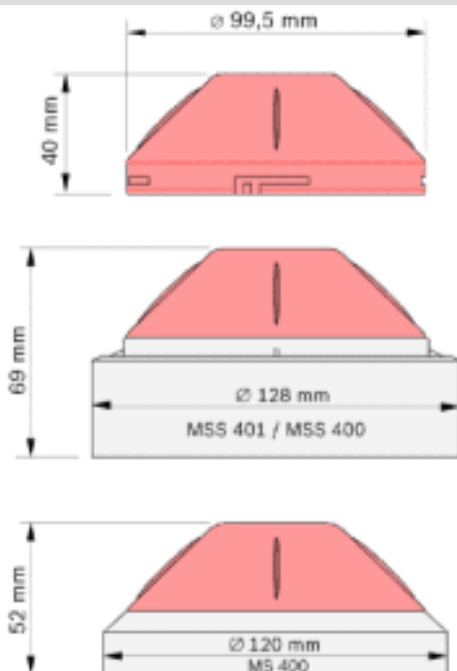

Functions

The LSN Strobe can only be used with the MSS 400 LSN and the MSS 401 LSN Detector Base Sounders providing a combination of visual and acoustic signaling. Mounted on the MS 400 Detector Base, the FNS-420-R can be used as a strobe without acoustic signaling.

Both applications are easily integrated into an existing Local SecurityNetwork (LSN).

Note The FNS-420-R LSN Strobe cannot be used with stand-alone or conventional sounders.

Certifications and Approvals

Region	Certification	
Germany	VdS	VdS G 207145 FNS-420-R
Europe	CE	FNS-420-RLSN

Installation/Configuration Notes

The FNS-420-R LSN Strobe can be connected exclusively to the FPA-5000 fire panel.

Parts Included

Quant.	Component
1	FNS-420-R LSN Strobe, Red

Technical Specifications

Electrical

Operating voltage	28 V DC (15 to 33 V DC)
-------------------	-------------------------

Current consumption	0.5 to 6.55 mA
---------------------	----------------

Light intensity	> 2 cd
-----------------	--------

Mechanical

Dimension (H x W)	40 x 99.5 mm
-------------------	--------------

Weight	67 g
--------	------

Material	PC, ABS (UL94 V-2)
----------	--------------------

Environmental conditions

Operating temperature	-20 °C to 60 °C
-----------------------	-----------------

Protection class as per EN 60529	IP 42
----------------------------------	-------

Ordering Information

FNS-420-R LSN Strobe, Red

FNS-420-R

Optical signaling device that can be connected to the FPA-5000 fire panel.

Americas:
Bosch Security Systems, Inc.
130 Perinton Parkway
Fairport, New York, 14450, USA
Phone: +1 800 289 0096
Fax: +1 585 223 9180
security.sales@us.bosch.com
www.boschsecurity.us

Europe, Middle East, Africa:
Bosch Security Systems B.V.
P.O. Box 80002
5600 JB Eindhoven, The Netherlands
Phone: +31 40 2577 284
Fax: +31 40 2577 330
emea.securitysystems@bosch.com
www.boschsecurity.com

Asia-Pacific:
Bosch Security Systems Pte Ltd
38C Jalan Pemimpin
Singapore 577180
Phone: +65 6319 3450
Fax: +65 6319 3499
apr.securitysystems@bosch.com
www.boschsecurity.com

Represented by